

PLAN OF PEDESTRIAN WALKWAY TYPE 2 (TYPICAL)
SCALE 1:50

dotted line indicate perforated pipe underneath walkway for subsoil drain where necessary


5mm expansion aluminium strip joint every 5m

25mm thk. concrete imprint finish colour and pattern to L.A.'s approval

150mm width concrete edging with 12.5mm thk. cement plaster and painted finish

100mm thk. compacted hardcore

100mm thk. brick slab

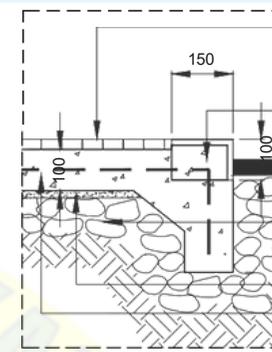


detail 'a'
SCALE 1:10

25mm thk. concrete imprint finish colour and pattern to L.A.'s approval


150mm width concrete edging with 12.5mm thk. cement plaster and painted finish

100mm thk. compacted sand bedding layer

100mm thk. brick slab

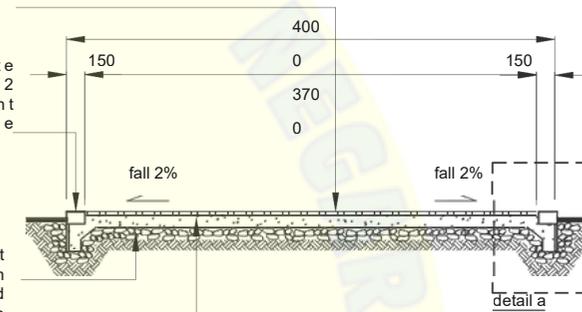

SECTION A-A
SCALE 1:50

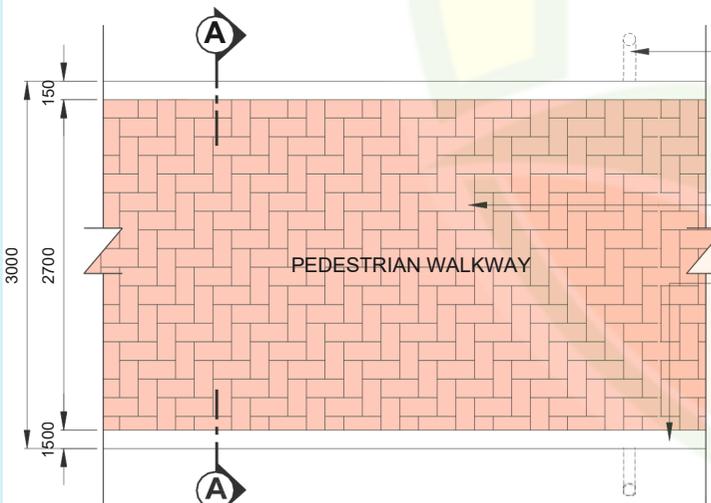


PLAN OF PEDESTRIAN WALKWAY TYPE 1 (TYPICAL)
SCALE 1:50

dotted line indicate perforated pipe underneath walkway for subsoil drain where necessary


60mm thk. interlocking pavers placed on wet concrete edge restraint

150mm width concrete edging with 12.5mm thk. cement plaster and painted finish

50mm thk. bedding sand existing compacted hardcore

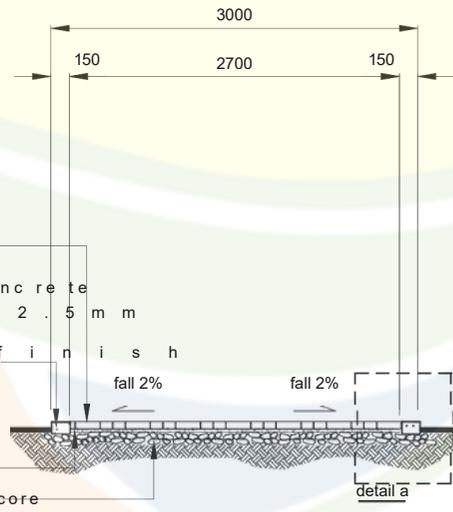

SECTION A-A
SCALE 1:50

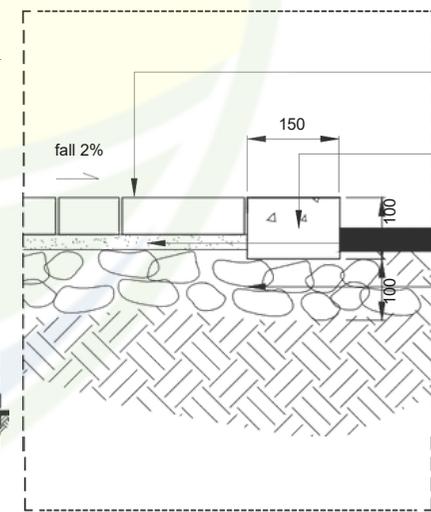

detail 'a'
SCALE 1:10

60mm thk. interlocking pavers placed on wet concrete edge restraint

150mm width concrete edging with 12.5mm thk. cement plaster and painted finish

50mm thk. bedding sand

existing compacted hardcore

PEDESTRIAN WALKWAY TYPE 1 & 2 (TYPICAL)

NOTE:
All dimension and measurement will be determined and finalised on site

TENDER DRAWING